

Document downloaded from the institutional repository of the University of Alcalá: <http://ebuah.uah.es/dspace/>

This is a postprint version of the following published document:

Urueña, M., Soto, I., Martínez Yelmo, I. & Calderón, M. 2017, "Effect of content popularity, number of contents and a cellular backup network on the performance of content distribution protocols in urban VANET scenarios", *Computer Communications*, vol. 99, pp. 13-23.

Available at <https://doi.org/10.1016/j.comcom.2016.12.002>

© 2016 Elsevier

*(Article begins on next page)*



This work is licensed under a

Creative Commons Attribution-NonCommercial-NoDerivatives  
4.0 International License.

# Effect of content popularity, number of contents and a cellular backup network on the performance of content distribution protocols in urban VANET scenarios

Manuel Uruña<sup>a,\*</sup>, Ignacio Soto<sup>a</sup>, Isaias Martinez-Yelmo<sup>b</sup>, Maria Calderon<sup>a</sup>

<sup>a</sup>*Departamento de Ingeniería Telemática, Universidad Carlos III de Madrid, Avda. Universidad, 30, 28911 Leganes (Madrid), Spain*

<sup>b</sup>*Departamento de Automática, Universidad de Alcalá, Campus Universitario N-II, km. 32, 28871 Alcalá de Henares (Madrid), Spain*

---

## Abstract

Different types of infotainment and traffic efficiency applications make use of content distribution protocols in vehicular networks. Current research on content distribution has been focused on designing efficient protocols, but it has put little effort in modeling the nature of the applications that consume and generate those contents, or in studying the internetworking with cellular networks. This paper studies the effects of application characteristics on the performance of push- and pull-based content distribution protocols in VANETs. In particular, it considers the total number of contents being distributed, the popularity of those contents, and the utilization of a cellular backup network to guarantee a level of service for delay-bounded applications. We also propose the Multi-Hop To Infostation (MHTI) protocol: a pull-based, multi-hop protocol that sends content requests towards the closest infostation. Requests can be satisfied before reaching the infostation by any vehicle in the path that has cached the requested content. Our analysis indicates that the performance of push- and pull-based protocols is only satisfactory in scenarios with a low number of contents or highly popular ones, while MHTI also exhibits a good performance with a large number of contents, and it takes advantage from different content popularities to obtain

---

\*Corresponding author

*Email addresses:* [muruena@it.uc3m.es](mailto:muruena@it.uc3m.es) (Manuel Uruña), [isoto@it.uc3m.es](mailto:isoto@it.uc3m.es) (Ignacio Soto), [isaias.martinezy@uah.es](mailto:isaias.martinezy@uah.es) (Isaias Martinez-Yelmo), [maria@it.uc3m.es](mailto:maria@it.uc3m.es) (Maria Calderon)

a high number of contents through the VANET.

*Keywords:* Vehicular ad hoc network (VANET), Cellular offload, Content distribution protocol, Content popularity

---

## 1. Introduction

Research on Vehicular Ad hoc Networks (VANETs) was initially driven by safety applications, but there is an increasing interest in also using VANETs for traffic efficiency and infotainment applications by taking advantage of connectivity with infrastructure networks (i.e., Internet) [1]. In many of these applications, specially in urban environments, the VANET is used for the dissemination of contents that can be of interest for some or all vehicles in the VANET. In these applications, contents will typically be relevant in a certain geographical area and during a certain period of time (i.e., contents have an associated lifetime) [2, 3]. Therefore, although users typically may accept some delay in getting a content, they will also have a deadline from which the content is not useful for them anymore.

There are many different types of traffic efficiency [4, 5] and infotainment applications [6, 7, 8] that can be based on content distribution. For instance, they may involve distributing, in a certain geographical area, current traffic information or points of interest with dynamic characteristics, such as prices in nearby gas stations, parking information, cultural and sport events, or advertisements with offers from shops or restaurants in the area. Each application type imposes different requirements to content distribution mechanisms. Advertisement applications [6, 8] are focused on reaching as many users as possible, although delay is not a critical factor. On the other hand, a user looking for the cheapest gas station is expecting to get such information in time to be useful. Moreover, probably all vehicles are interested in traffic information updates, but only few of them are looking for modern art exhibitions.

However, we argue that in realistic deployments it makes little sense that each application implements its own dissemination mechanism. Instead, a better approach would be employing a common content distribution framework that handles multiple contents with different popularity. Also, as the VANET performance depends on vehicle density, and consequently it cannot be guaranteed (e.g., vehicle traffic at 4:00 AM will be sparse), in order to offer predictability, this content delivery system will need a wireless wide

area network, such as a cellular network, as a backup to the VANET. This allows that, if the content cannot be obtained through the VANET in the expected time, it can be requested using the cellular network [9]. We could think in offering the service to vehicles just using the cellular network, but experience has shown that having alternatives to avoid overloading the cellular network is critical to achieve a cost-effective solution to offer wireless access [10]. This will be even more so with the growth in number of users expected in 5G networks (e.g., with the integration of Internet of Things applications). Therefore, the combination of vehicular networks based on short range communications and cellular networks to offer content delivery services to vehicles is a good approach from the point of view of efficiency in resource usage. With high vehicle densities (without network congestion) the VANET performs better and most contents can be obtained without relying on the cellular network, whereas a low vehicle density also means a low load for the cellular network. Thus, we can save the expensive and scarce resources of the cellular network when there is more demand. The use of the cellular network also has a seeding effect in the VANET: when a searched content is not available in an area, it will be downloaded through the cellular network, making the content available in that area through the VANET from that moment on. This seeding effect has a significant impact on the performance that cannot be ignored when studying content dissemination protocols for VANETs.

Several protocols have been proposed in the literature for non-safety data dissemination in VANETs [5, 6, 8, 11, 12]. The merits of those protocols are studied by means of performance parameters such as overhead, percentage of cars that receive a content, or average content distribution delay. However, less effort has been put in studying and modeling the nature of the applications that consume and generate those contents. We can identify two main families of protocols for content distribution in VANETs: push and pull protocols. In this paper we show that the relative performance of each family of protocols is heavily influenced by the number of contents to be distributed and their popularity, which depends on the nature of the content distribution application. In fact, we show that a family of protocols that can achieve very good performance for some applications, can perform poorly in other circumstances. In order to deal with these challenges, we propose a pull-based, multi-hop protocol, called Multi-Hop To Infostation (MHTI), that forwards content requests towards the closest infostation (a node connected to the fixed infrastructure), but that can be also replied by any node in the path

that has the requested content in its cache. This kind of multi-hop protocol is not common in the literature of content distribution in VANETs, because the assumption is that other kinds of simpler, one-hop protocols can provide enough performance. We show in this paper that, although this is true for certain content distribution applications with few contents, this is false in many other situations, where we require a multi-hop protocol to achieve better performance. This improvement in performance translates to significant savings in cellular network usage. Our work has been validated using a simulation environment based on OMNET++ [13] that includes a real urban map, buildings that affect signal propagation, and a faithful micro vehicle traffic management representation thanks to the use of SUMO [14, 15]. All the tools and datasets that we have employed, such as the implementation of the protocols, the map with obstacles, and the vehicle traces are publicly available<sup>1</sup> to foster future developments in this research field.

The rest of the article is organized as follows: in Section 2 we review the key protocols in the literature for content distribution in VANETs, also identifying the conditions in which the evaluation of the protocols was done; in Section 3 we describe three different reference protocols for content distribution, classified in different families, including the proposed MHTI protocol; in Section 4 we introduce our simulation environment; in Section 5 we present the quantitative results of our experiments with the three families of content distribution protocols in VANETs; and finally, in Section 6, we summarize the conclusions of our work.

## 2. State of the art in VANET content distribution protocols

In the literature there are many protocols proposed to support multi-hop dissemination of contents, but most of them are tailored for safety-related applications, which require a strict time-constrained data dissemination. These protocols mainly concentrate on how to choose the next forwarder to efficiently deliver a safety-related content (e.g., a warning of a collision ahead) to all the vehicles in an area, while optimizing the dissemination delay (i.e., intelligent flooding schemes). Note that this safety-related scenario is quite different from our target scenario. Thus, in the related work that follows, we leave out the dissemination schemes tailored for safety-related applications.

---

<sup>1</sup><http://www.it.uc3m.es/muruenya/research/MHTI.tar.gz>

Our work is focused on scenarios where traffic efficiency and infotainment applications use the VANET to disseminate non-safety contents that can be of interest for some or all vehicles. These contents have an associated lifetime, but users typically may accept some delay in getting a content. In general, contents can be obtained from infostations located at fixed points of the infrastructure, or from other vehicles that already have the content. In the literature there are several protocols proposed to cope with this non-safety data dissemination scenario, which we review below. The usual approach is to make use of caching to improve the efficiency of dissemination. Thus, content replicas are stored in vehicles for its future distribution to other vehicles. This store-carry-and-forward data dissemination model is considered valid for both infotainment and traffic efficiency applications.

Two main families of dissemination protocols can be identified in the literature: push- and pull-based. In the push model, data are periodically broadcast to neighbors. In this way, a content is broadcast to potentially interested users by an infostation, or by any another vehicle that has previously obtained the content and has it in its cache. In the pull model, data are delivered on demand, i.e., a content is explicitly requested by a vehicle. Therefore, the interested vehicle first sends a content request, and it eventually receives the content if such request gets to some node that has the content, either an infostation or another vehicle that has the required content in its cache.

As it was previously mentioned, we argue that some key characteristics of the applications should not be ignored. Namely, the total number of contents, their popularity, and the utilization of a cellular network as a backup mechanism to guarantee a bounded delay. Thus, we review the main dissemination protocols for vehicular networks, paying special attention to the conditions in which the performance of these protocols has been evaluated.

A significant number of dissemination protocols belong to the push-based family [2, 3, 4, 5, 6, 11, 16]. Among them, an interesting subset of these works [2, 6] focus on the concept of *abiding geocast*, analyzing different mechanisms to guarantee that data keep being distributed in an area for a certain period of time (i.e., a content is interesting for some time and so it is sticked to the area during this time). However, these protocols [2, 6] have been evaluated considering that only 1 content has to be distributed in the area, which is a simplistic assumption in realistic scenarios. On the contrary, another subset of these works [4, 5] evaluate the proposed protocols considering as many contents as vehicles exist in the scenario. In particular, in [4] a rel-

evance function is used to determine what contents should be cached, while [5] focuses on analyzing the impact of having an adaptive timer, instead of a periodic one, to broadcast contents to neighbors. In the case of [16], apart from the neighbors that periodically broadcast contents, the existence of some standalone infostations, located at intersections, which buffer and rebroadcast contents, is considered as well. Interestingly, the number of contents considered in the evaluation of this protocol ranges from 10 to 600, in a simulation setup with 210 vehicles, and the experiments show that the number of contents has a strong impact on the performance of push protocols, result that is consistent with our work. However, our study covers the different families of content distribution protocols (push, pull and pull multi-hop), extends the number of contents up to 100,000 finding an asymptotic behavior, and considers not only the number of contents but also their popularity.

A second group of papers has explored the approach of pull-based protocols, where contents are explicitly requested by vehicles. A first possibility is that this interest is spread one-hop away, as it is proposed in [12], where vehicles periodically disseminate their interests to their one-hop neighbors, and eventually the content is received by the interested node if this interest reaches a neighbor (vehicle or infostation) that has it in its cache. However, this one-hop pull protocol was evaluated assuming the existence of a single content to be disseminated in the area. A second possibility, considered in [17, 18], is that the requests are forwarded several hops away from the requesting vehicle. However, these interesting works are only partially relevant to ours, since they mainly deal with applying the paradigm of content-centric networking to vehicular networks. Although [17] is a pioneering work in taking into account the number of contents (4 and 32 contents are considered in the evaluation) and their popularity (two different popularity values are considered), it does not follow a systematic approach to analyze the impact of these aspects on the different dissemination protocols, as our work does, nor considers a cellular backup network.

A recent paper [8] proposes Starfish, a protocol that combines a push-based approach with the infostation pushing contents (100-KB files) using a round robin strategy, and a one-hop pull approach with vehicles asking for the missing contents. Contrary to our work, Starfish does not consider delay-bounded applications (the same contents are delivered for several days), and popularity is not taken into account. Starfish has been evaluated through real experiments using a roadside infostation and several vehicles moving

around, which is very valuable but limits the evaluation scenarios.

Moreover, none of the aforementioned works considers the internetworking of cellular networks and short-range communications (i.e., the VANET). Recently, there exist some works that advocate about their combination in vehicular communications [9, 19, 20, 21, 22, 23, 24], although they do not deal specifically with the content distribution problem in store-carry-and-forward networks. In particular, in [22] the authors propose the use of a 3G cellular network to gather and distribute relevant control information (e.g., connectivity in the different roads) with the goal of improving the routing process over the VANET. Similarly, in [24] LTE is used to organize the vehicular network into clusters and to maintain this structure over the time. On the contrary, in [23] the cellular network is used to exchange data when there is not a multi-hop VANET path between the source and destination vehicles. In [9, 21] the VANET is used to offload 3G cellular network in vehicle-to-Internet scenarios by delivering data originally targeted to cellular networks via WiFi, with the goal of alleviating the congestion of cellular networks. Some recent studies [19, 20] focus on content distribution with peer-to-peer (P2P) cooperation. In common with these works, we also propose the combination of cellular networks and short-range communications. However, while these works use the store-and-forward communication paradigm, in our research the vehicular network applies a store-carry-and-forward approach for content distribution. Therefore, these works can be considered orthogonal to ours.

Closer to our work, there is a recent paper [25] that considers the hybrid use of short-range and cellular radios to optimize the dissemination of delay-tolerant contents using a store-carry-and-forward approach, although the cellular network is only used for seeding, not for guaranteeing a bounded delay. This work analyzes mathematically the push-based content dissemination process, formulating it as an optimization problem from the perspective of the content provider. It is worth mentioning that its analytical model considers the effect of interest popularity, concluding that this parameter has an important impact on the performance of push content distribution protocols, result that is consistent with our work. However, we provide experimental results by means of simulations, and we cover the different families of content distribution protocols (push, pull and pull multi-hop) finding that popularity affects differently each family.

Table 1 summarizes the conditions in which the evaluation of the aforementioned content distribution protocols has been performed (for works



Table 1: Analysis of VANET content distribution protocols

Protocol	Type	# Contents	Popularity	Cellular network
[2]	Push/Pull	1	No	No
[3]	Push	40	No	No
[4]	Push	$N^*$	No	No
[5]	Push	$\sim N^*$	No	No
[6]	Push	1	No	No
[11]	Push	$N^*$ per sec	No	No
[12]	Pull	1	% interested cars	No
[16]	Push	[10-600]	No	No
[18]	Pull	1	No	No
[17]	Pull	{4, 32}	Zipf $\alpha=\{0.0, 0.8\}$	No
MHTI	Pull	[1-100,000]	Zipf $\alpha=[0.0-2.0]$	Yes

\* N is the number of vehicles

based on simulation), including MHTI, the protocol that we propose in this paper. Namely, the total number of contents, their popularity, and the utilization of cellular networks as a backup mechanism to guarantee a bounded delay. As we have seen, many works only consider one or few contents (e.g. < 50), or assume that all vehicles are equally interested in all contents. Moreover, none of the reviewed works include a cellular backup network in their experimental simulations. From this analysis we came to the conclusion that more research was needed to understand what is the impact of application characteristics<sup>2</sup> and a cellular backup on the performance of VANET content distribution protocols.

### 3. Protocols for content distribution in urban VANET scenarios

As described in the previous section, we can identify two main families of VANET content distribution protocols: push- and pull-based. Furthermore, the pull protocols can follow a one-hop approach asking the contents only to neighbors, or a multi-hop approach in which contents can be obtained from nodes farther away through several hops.

---

<sup>2</sup>By 'application characteristics' we refer to the characteristics of the applications that define the properties of the contents to be distributed: their number and popularity.

Since we are not interested in studying a particular protocol proposal but we are trying to study the effect of application characteristics and the use of a cellular backup network in general, we have implemented three generic protocols to represent these three different families of content distribution protocols, including the proposed Multi-Hop To Infostation (MHTI) mechanism that follows the philosophy of sending multi-hop requests towards the closest infostation. Each protocol also has a number of optimizations that are enabled or disabled in order to compare their effects.

In the so-called push protocol (“Push”), every ten seconds<sup>3</sup> each node (car or infostation) chooses a random content from its cache and broadcast it to all its one-hop neighbors (see Figure 1). Whenever an advertised content is received, the vehicle stores it in the local cache (for simplicity we assume the cache is able to store all contents, thus no replacement policy is necessary), and then checks whether the local application is interested in this new content in order to return it immediately. Figure 1 also shows that when a vehicle fails to get a content through the VANET, after some timeout that depends on application requirements (120s in the figure), the vehicle will request the content through a cellular network. In the rest of the protocols that we describe in this section, we also use the cellular network as a backup when a content cannot be obtained through the VANET.

In the optimized push protocol (“Push-opt”), the next advertised content is not chosen randomly, but following a least recently used (LRU) policy. For instance to avoid a group of cars advertising the same content over and over again. Each car keeps for each cached content a timestamp that is updated whenever the content is either advertised or listened from other cars. Then, whenever a content has to be advertised, the one with the oldest timestamp is chosen (or a random one if multiple contents have exactly the same timestamp). The contents just downloaded through the cellular network have a zero timestamp, so they are advertised next.

Similarly, in the one-hop pull protocol (“Pull”), every ten seconds each car that has not obtained its content yet, and has not given up (due to an application timeout), broadcasts a request for a content to all its direct neighbors (see Figure 2). If any of them has the requested content in its cache,

---

<sup>3</sup>A 10s timer allows the vehicle to move 139m at 50 km/h, and thus reach other neighbors in next transmission (assuming a transmission range of 200m).

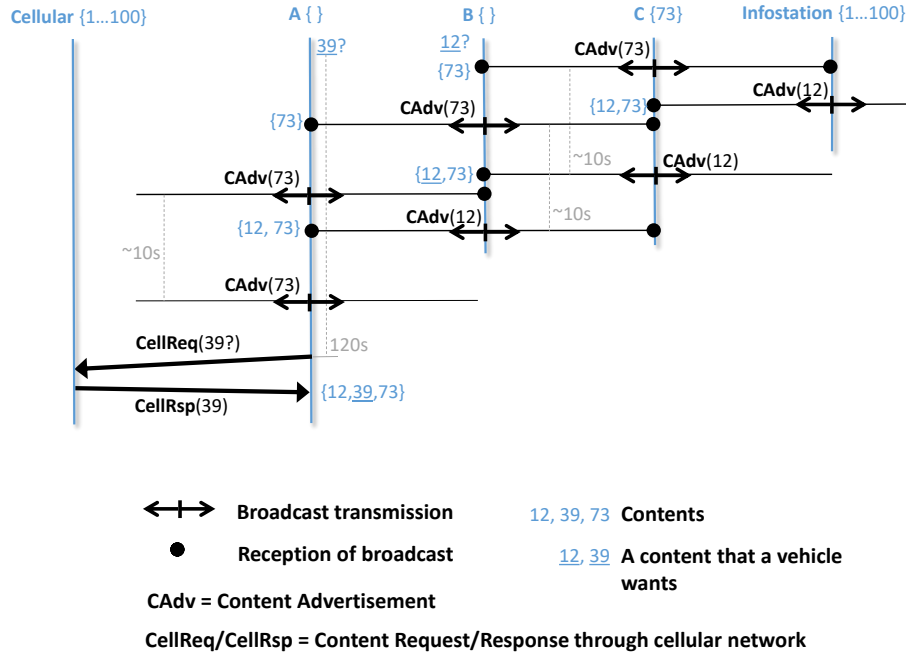


Figure 1: The Push protocol

it is replied back in unicast (with a random 100ms jitter<sup>4</sup> to avoid collisions), otherwise no response is returned. When the application has obtained its content or has given up, the car stops sending requests, although it may keep replying to other cars' requests.

In the optimized one-hop pull protocol ("Pull-opt") the content responses are sent in broadcast to one-hop neighbors, so the requested content can be overheard by nearby cars, which also store it in their caches. Moreover, when a content is downloaded through the cellular network, it is also immediately advertised to one-hop neighbors, like in the Push protocol. This is done because, since it has been downloaded through the cellular network, this means that neighbor cars do not have such content (otherwise they would have responded to the request).

The third protocol is the proposed Multi-Hop To Infostation ("MHTI")

<sup>4</sup>A 100ms jitter prevents packet collisions even in high density scenarios, whereas its effect on vehicular mobility is negligible: in 100ms a car moves less than 2 meters at 50 km/h.

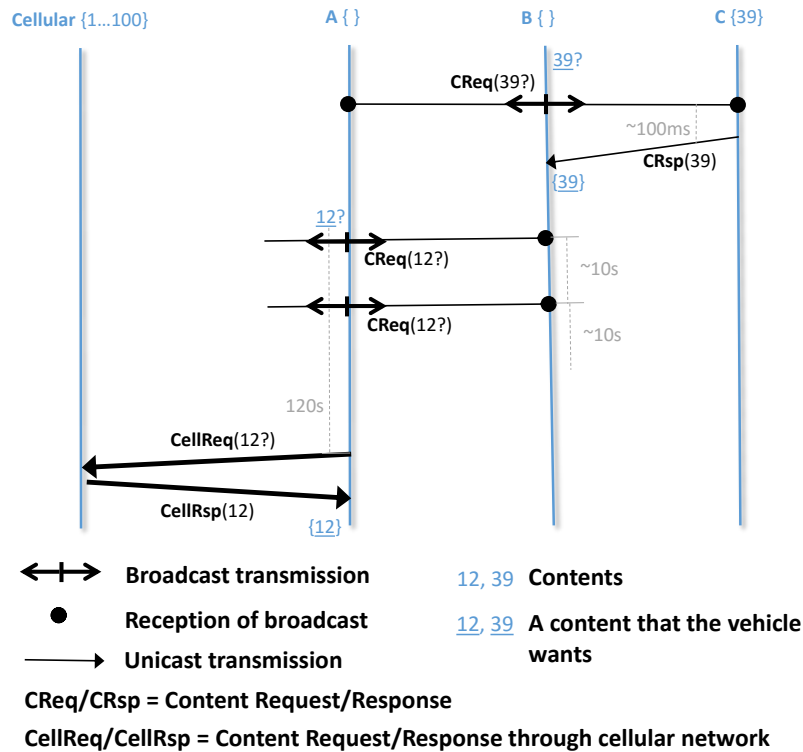


Figure 2: The Pull protocol

one. Similarly to previous protocols, cars that have not obtained a content they want, and have not given up (due to an application timeout), will try to get the content every 10 seconds. In MHTI, to get a content, content requests are sent towards the nearest infostation employing a simple geographical routing protocol based on greedy forwarding [26]. The operation on each hop is similar to the one-hop Pull protocol: content requests are first broadcast to one-hop neighbors (see Figure 3), but now the neighbors that do not have the content, but are nearer to the target infostation than the requesting car, reply with their addresses and coordinates (in a so-called Neighbor message)<sup>5</sup>. Thus, if the car hasn't received the content after 100ms, it forwards the content request message to the closest neighbor to the target

<sup>5</sup>Content Responses and Neighbor messages are sent with a random 100ms jitter to avoid collisions.

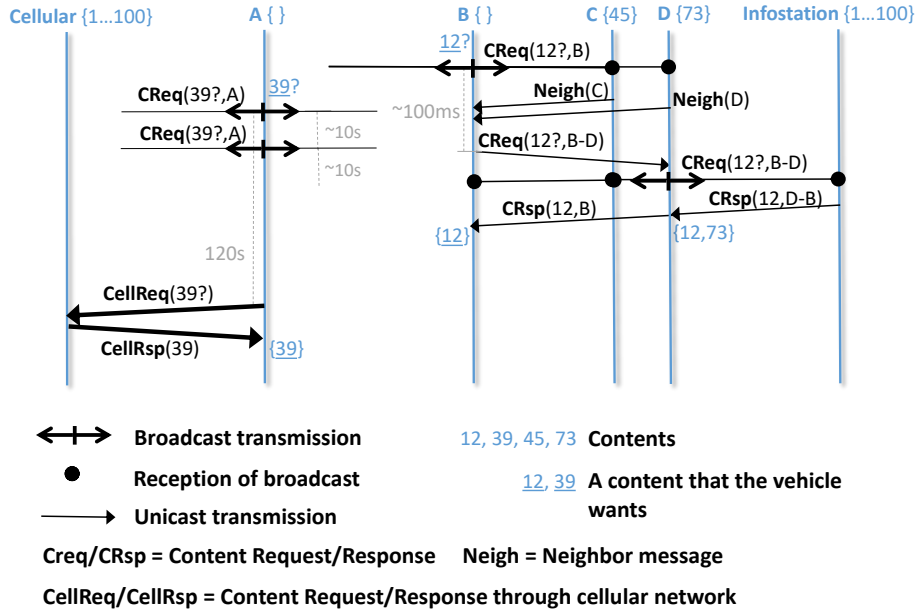


Figure 3: The MHTI protocol

infostation (i.e. we assume cars know the coordinates of all infostations in the area<sup>6</sup> so they can target the nearest one). This process repeats until the infostation or another car replies with the requested content. The content reply follows the same multi-hop path (which has been recorded in the content request message) in reverse<sup>7</sup>, and it is also stored in the content cache of all intermediate nodes. Although the movement of vehicles can potentially affect the stability of multi-hop paths, in practice the speed of vehicles (at most 50 Km/h or 13.89 m/s in an urban environment) means a vehicle moves not more than just a few meters in the time needed to send a message (a request) and receive a reply (a content). Therefore, the multi-hop path is, in general, stable during a MHTI message exchange.

Let us illustrate the behavior of the MHTI protocol with the example

<sup>6</sup>The location of all infostations in the area could be included in the digital maps of GPS navigators, or be downloaded through the cellular network.

<sup>7</sup>The random 100ms jitter is only used when the Content Response message is generated, not when it is forwarded, as it is only in the former case that there can be multiple replies from different neighbors.

in Figure 3. Vehicle B first requests content 12 using a broadcast Content Request message. This request is received by its neighbors: vehicles C and D. Neither has content 12, so they reply with Neighbor messages at random times in the 100 ms window following to the reception of the request message. B learns, through the information in the Neighbor messages, that vehicle D is its neighbor that is the closest to the nearest infostation. Thus, after 100ms, when B does not get the content, it sends a unicast Content Request message to D. This message also includes the path followed by the request until that moment, in this case vehicles B and D. Vehicle D repeats the procedure and gets content 12 from the Infostation in a Content Response message. The Content Response includes the complete return path to the source (vehicle B) copied from the request message. Accordingly, D forwards the content to vehicle B. Note also in Figure 3 that vehicle A requests content 39, but it does not get it through the VANET, as there is not a path to a infostation or other node with that content. Therefore, after 120s, vehicle A obtains the content through the cellular network.

The optimized version of the MHTI protocol (“MHTI-opt”), as the optimized one-hop Pull-opt one, also features broadcast responses and advertises contents downloaded through the cellular network to one-hop neighbors. Moreover, in order to reduce the number of Neighbor messages, they are only sent if there has not been a content response yet. Finally, the potential Neighbor responses are sent according to their distance to the requesting car. This way, cars far away (max. 175m) reply in broadcast with their coordinates first, and other neighbors only send theirs if they are closer to the target infostation than previous ones.

#### 4. Simulation scenario

For our simulation study, we need a representative urban scenario where different traffic conditions can be defined. We also need a flexible tool that is able to model realistic communications and evaluate the desired protocols properly. Hence, the Veins 2.0 platform [27] was selected to conduct our simulation study. The Veins (Vehicles in Network Simulation) platform integrates the OMNeT++ [13] event-based network simulator with the SUMO (Simulation of Urban MObility) road traffic simulator [14, 15]. OMNeT++ allows the implementation and simulation of the protocols under study, using the MiXiM toolkit (that is integrated in Veins) for modeling the physical and MAC layers (IEEE 802.11b/g) of the network communications. Fur-

Table 2: Parameter settings in the simulations

Parameter	Value
Roadmap [size]	Madrid [4.5x4.5 $km^2$ ]
Number of vehicles	[2,000-9,000]
Number of infostations	4
Simulation time	3600 s.
Max speed	50 km/h
MAC/PHY	IEEE 802.11b/g 2.4 GHz
WiFi channel rate	2 Mbps
WiFi transmission range	200 m
Shadow fading model	[28]
Cellular channel bandwidth	100 Mbps per car
Content size	1,000 bytes
No. of contents	[1-100,000]
Contents' popularity	Zipf $\alpha$ =[0.0-2.0]

thermore, Veins includes additional enhancements, such as a shadow fading model for buildings in urban and suburban scenarios [28]. SUMO provides an accurate modeling of microscopic vehicular traffic, simulating the behavior of drivers<sup>8</sup>. The integration of OMNeT++ and SUMO is made through the Traffic Control Interface (TraCI) provided by SUMO.

Table 2 shows the main parameters used for the simulations, which are discussed in next subsections.

#### 4.1. Urban area map

In order to conduct our experiments, we need a representative urban area. We have selected an area of 4.5 x 4.5  $km^2$  from Madrid city center. The streets and traffic data of this urban area were obtained from OpenStreetMap (OSM) [30], using the Java OpenStreetMap editor (JOSM) [31] in order to extract the desired area and verify its junctions and connections. The maximum speed of all streets has been set to 50 km/h. Then, the final map was converted to SUMO XML format. The urban area map is shown in Figure 4(a). In addition, we also consider the effects of shadowing due to

---

<sup>8</sup>In our simulations we use the default models and parameters in SUMO. In particular, the car-following model is the SUMO extended Krauss model [15], and the lane changing model is the one described in [29].

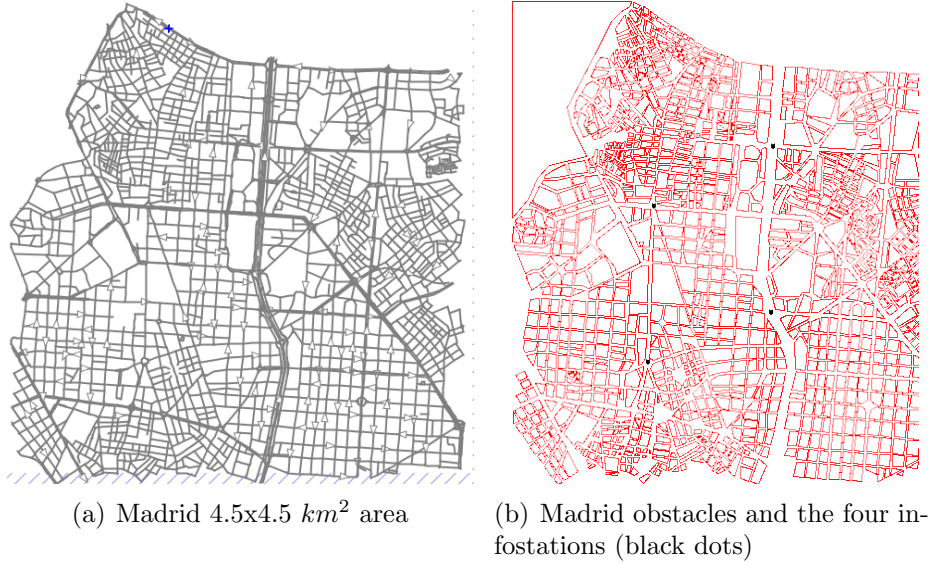


Figure 4: Madrid map and its associated obstacles and infostations locations

buildings in wireless data transmissions. We achieve this using the additional models provided by Veins to the OMNeT++/MiXiM framework [28]. However, we first needed to create the obstacles associated to the buildings in the map. We have generated those obstacles manually, with a custom developed tool, by considering each block of buildings like a single obstacle in order to accelerate the simulations. This procedure generates a worst case scenario, since it leads to greater propagation losses when information is transmitted. The considered obstacles are shown in Figure 4(b). In our experiments we use four infostations (except where specified otherwise). Their locations are shown in Figure 4(b). The infostations are placed at key map locations, such as the intersections of main avenues. We chose the number of infostations, which is a relatively small scale deployment for the map area, because we want to study the benefits of using the VANET for content distribution without requiring an expensive infrastructure deployment.

#### 4.2. Traffic conditions

After defining the map, it is necessary to create an input dataset containing different traffic conditions. A real-life, trace-based dataset could not cover all desired conditions, and we would be limited to use the specific urban area of the available traffic dataset. Therefore, we have generated a synthetic



Table 3: Traffic characteristics of the different scenarios

<b>N</b>	<b>Distance (m)</b>	<b>Stay time (s)</b>	<b>Speed (km/h)</b>
<b>2,013</b>	3,223.21	324.54	35.75
<b>3,012</b>	3,221.97	326.96	35.48
<b>4,011</b>	3,227.02	332.83	34.90
<b>5,035</b>	3,229.56	339.91	34.20
<b>6,082</b>	3,189.14	369.39	31.08
<b>7,087</b>	3,183.98	396.00	28.95
<b>8,165</b>	3,121.01	442.50	25.39
<b>9,220</b>	3,089.42	474.15	23.46

traffic dataset.

In particular, we consider between 2,000 and 9,000 cars making trips in our urban map. The insertion time of new cars is uniformly distributed along the one-hour simulation time. The different trips of the cars are generated between two random points of the map, although we require a minimum distance per trip of 1 km. The cars leave the simulation as soon as they reach their destinations. The assignment of routes to trips is not a trivial issue, because it depends on the distance, user preferences and traffic conditions. Therefore, we use the Dynamic User Assignment (DUA) algorithm [32, 33] to assign a route to each trip, which uses the A-star algorithm [34] to calculate the relative distances in an iterative process that we limit to 30 repetitions.

As result of the above process, we generate five different SUMO XML route files for each scenario with a different total number of cars. Then, a one-hour simulation (i.e. 3,600s) is run for each scenario with the five different generated routes in order to calculate 95% confidence intervals for all experimental results.

Table 3 shows the average trip distance, stay time (i.e., trip duration) and speed of all cars in the five simulations of each scenario, where N is the average number of cars in the scenario. Notice that the average speed of cars decreases, and the average stay time increases, with traffic density, as expected. The average trip distance decreases slightly because, as the time cars need to complete their trips increases, there are more cars at the end of the simulation that have not finished their trips.

### 4.3. Network capabilities of vehicles

We consider that all vehicles have a dedicated short-range wireless communication system for non-emergency applications, employing the IEEE 802.11b/g standard. We think that using general purpose wireless technologies is appropriate for a content distribution system as the one we propose, since this approach enables the usage of general purpose devices for participating in the system, whereas specialized wireless technologies, such as IEEE 802.11p, will probably be reserved for safety applications. The transmission rate for the chosen IEEE 802.11b/g technology is fixed to 2 Mbps in order to maximize the communication distance among vehicles (around 200m without obstacles) and robustness (communications are mostly broadcast transmissions). Higher rates would allow having more bandwidth available in the VANET without affecting the conclusions of our work, as we are not exploring saturation scenarios in the VANET. In addition, all vehicles also have cellular communications capabilities. In particular, we simulate the use of a 5G-like cellular network with an available bidirectional rate of 100 Mbps per car, which is consistent with what we can expect in future 5G networks. Nevertheless, we prioritize the use of the VANET, offloading as much load as possible from the cellular network because, even with the increased bandwidth in 5G, it will still be an expensive and scarce resource due to the growth in users and bandwidth requirements (video traffic, Internet of Things, connected vehicles, etc.) [10].

### 4.4. Number and popularity of contents

To understand the impact of application characteristics in content distribution protocols, we have performed a thorough simulation study where we analyze the impact of the total number of contents ( $M$ ). We vary  $M$  from 1 to 100,000, as well as the popularity distribution of those contents, by using a Zipf distribution with an  $\alpha$  exponent ranging from 0.0 (i.e. uniform distribution) to 2.0 (i.e. few highly popular contents). Therefore, at the beginning of the simulation,  $M$  contents are generated and a Zipf popularity distribution is computed with the given  $\alpha$  exponent. The popularity of each content is the probability of being chosen by a vehicle as its content of interest (each car is interested in a single content during its trip). For simplicity, we assume that all contents have a fixed size of 1,000 bytes, so they fit in a single IEEE 802.11 frame.

The bounded delay for obtaining the content of interest is implemented with a 120s timer, which starts as soon as each car starts its trip. If the

content is not obtained before its timeout, the content is downloaded by 5G and stored in the cache. This timer represents the maximum delay applications can wait for the contents. A too small value gives few opportunities to get contents through the VANET, while a large value might be unacceptable for many applications. Note that the 120 s value is roughly a third of the average stay time of cars in the studied scenario, so that this is the time the vehicles have to obtain the content through the VANET. The rest of the time, vehicles just keep distributing their cached contents to other vehicles. It makes sense to relate stay time and maximum delay, as it is reasonable that if a vehicle is in an area for some time, the contents, which are typically related to the geographical area, must be obtained in time to be useful.

## 5. Performance of VANET content distribution protocols

### 5.1. Effect of car density

In our first scenario we have just one content to be distributed. The success ratio is measured as the average number of contents that cars obtain through the VANET or, since each car is interested in a single content, it can also be seen as the percentage of vehicles that receive their desired content through the VANET. Notice that the contents not obtained through the VANET after 120s will still be downloaded through the 5G network and stored in the local cache.

Figure 5 shows the VANET success ratio for different vehicle densities for the three different content distribution protocols (Push, Pull and MHTI), including its optimized versions (Push-opt, Pull-opt and MHTI-opt)<sup>9</sup>. Since there is no data congestion, success ratio improves with density as expected, albeit very little given the high success ratio (88%) even at the lowest density. The difference between the three protocols is thus quite small, and it does not depend on vehicle density nor on optimizations. Therefore, with a single content, even the simplest protocols are able to obtain almost a 100% VANET delivery ratio (it does not reach 100% because the simulation stops with vehicles that have just arrived to the scenario and thus they have not been able to get the content yet).

The effect of optimizations can be only seen in Table 4, which shows the relative overhead of each protocol. This relative overhead value is computed

---

<sup>9</sup>Note that when we have just one content ( $M=1$ ), there is not difference between the Push and the Push-opt protocols.

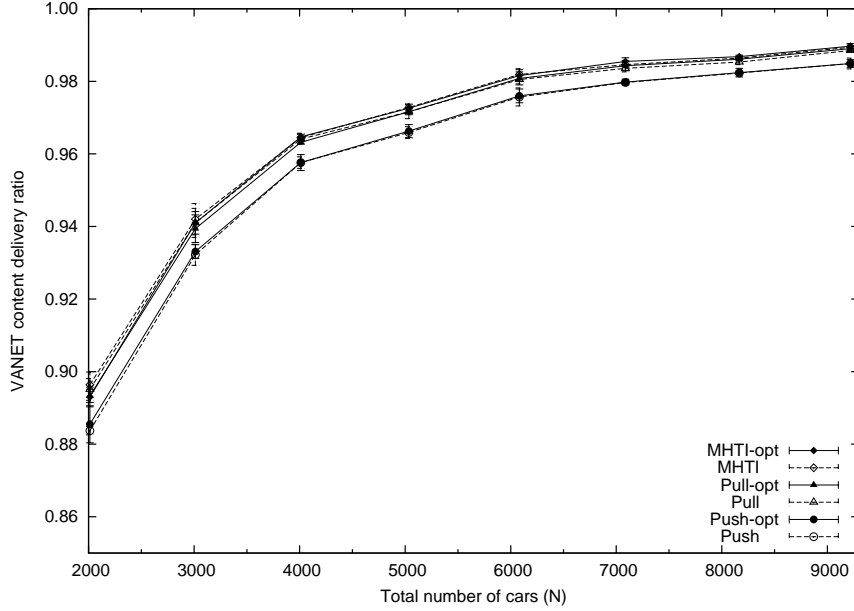


Figure 5: Distribution of one content with different vehicle densities ( $M = 1$  content)

as the ratio between the number of bytes transmitted by a car, including both the payload and headers as well as any control messages (e.g., ACKs), divided by the number of contents obtained through the VANET, times 1,000 bytes (i.e. the size of each content). Therefore, the relative overhead value roughly defines the average number of times cars have to transmit a content in order to deliver it to an interested vehicle. A relative overhead of 1.0 would be the optimum one, because it would mean only one transmission, with only the content bytes, has been necessary to deliver the content. Clearly Push protocols that periodically transmit the cached content have a much higher relative overhead than Pull ones. The overhead of Push protocols increases with density because the more cars, the earlier the content is received, and thus it is transmitted more times. Pull and MHTI protocols have the same performance and overhead because, in this scenario, the MHTI protocol usually gets the content from the first hop (i.e. as the one-hop Pull protocol). The optimized versions of both pull-based protocols greatly reduce the over-

Table 4: Relative overhead of distributing one content with different vehicle densities ( $M = 1$  content,  $N$  vehicles)

$N$	Push	Push-opt	Pull	Pull-opt	MHTI	MHTI-opt
2,013	31.89	31.85	1.70	1.40	1.82	1.55
3,012	31.29	31.29	1.95	1.40	2.04	1.49
4,011	31.71	31.68	2.25	1.45	2.33	1.50
5,035	32.46	32.45	2.61	1.50	2.68	1.55
6,082	35.48	35.46	3.53	1.61	3.57	1.63
7,087	38.29	38.29	4.04	1.67	4.08	1.66
8,165	43.15	43.14	5.12	1.80	5.14	1.77
9,220	46.44	46.44	5.94	1.89	5.96	1.85

head, because they prevent several neighbors from responding to the same request with the same content.

Therefore, if there is only one content to be distributed, which is a common scenario evaluated by VANET researchers (see Table 1), any content delivery protocol provides a good performance, albeit Push protocols have a larger overhead than Pull ones (especially with the response filtering optimization).

### 5.2. Effect of the total number of contents

In our second scenario we explore the impact of the total number of contents. Each vehicle is still interested in one content, but now there are multiple contents being distributed in the VANET, and thus different vehicles are interested in different contents. Contents have a uniform distributed popularity (i.e. all contents are equally popular). From the previous results we have chosen a middle vehicle density of  $N = 6,000$  cars, so all protocols can achieve a reasonable performance from the density point of view. Figure 6 shows the VANET success ratio, i.e. the percentage of vehicles that obtain the content they are interested in through the VANET, for different number of contents ( $M = 1$  to 100,000 contents).

As it can be seen in Figure 6, the VANET success ratio decreases abruptly with the number of contents. Content distribution protocols cannot cope with a large number of contents, and even having 10 or 100 contents results in a low number of contents obtained through the VANET. The Push protocol seems to achieve a better performance than the Pull one with fewer contents but, as the total number of contents increases, its performance drops almost

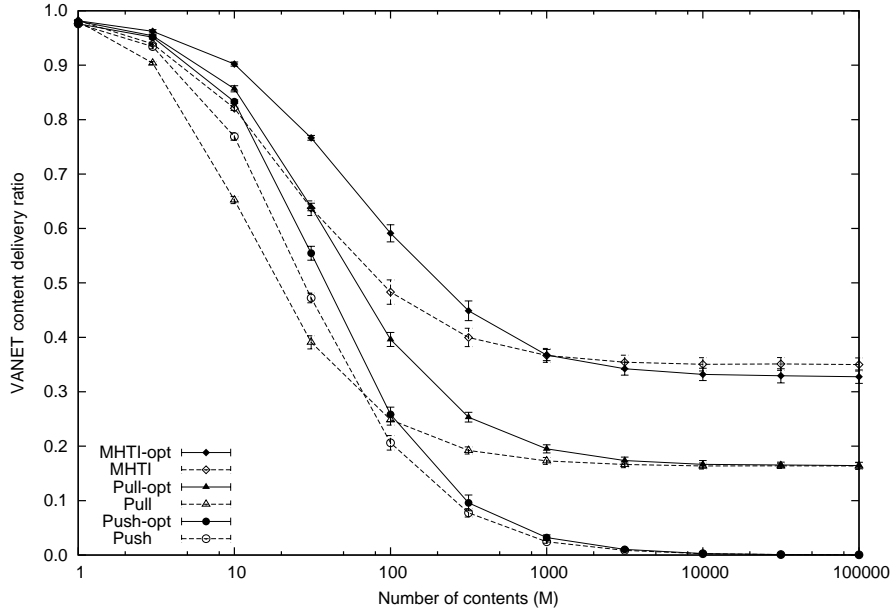


Figure 6: Distribution of multiple contents with uniform popularity ( $N = 6,000$  cars)

to zero, while the Pull protocol keeps a baseline VANET success ratio of 16%. The MHTI protocol is the best performer of the three families across the whole range of contents, although its performance also degrades with the number of contents until it stabilizes in a 35% success ratio.

For a low number of contents, the Push protocol outperforms the Pull one due to a more aggressive dissemination of contents that are cached in the vehicles. This helps to have the small number of contents available when needed. However, when the number of contents increases, the Push protocol is unable to distribute all contents in the available time, and thus the probability of receiving the desired content from a neighbor drops to almost zero. This low performance makes the relative overhead (shown in Table 5) to be extremely high.

The Pull protocol performs worse initially because vehicles only ask for the content they are interested in, so dissemination of contents in the VANET is much slower: a vehicle or infostation only transmits a content if it is asked

Table 5: Relative overhead of distributing multiple contents with uniform popularity ( $N = 6,000$  cars,  $M$  contents)

$M$	Push	Push-opt	Pull	Pull-opt	MHTI	MHTI-opt
1	35.48	35.46	3.53	1.61	3.57	1.63
10	45.01	41.56	1.52	1.55	3.53	2.24
100	167.99	133.91	1.53	2.94	8.09	5.27
1,000	1,427.24	1,100.61	1.66	5.69	11.50	9.91
10,000	18,397.56	12,637.97	1.69	6.64	12.16	11.27
100,000	104,161.62	91,131.74	1.68	6.72	12.32	11.48

for it and already has it. On the other hand, when the number of contents is very large and equally probable, it is almost impossible to find a particular content in the cache of a neighbor car. Nevertheless, the Pull protocol can still achieve some success ratio because a vehicle that travels close to a infostation can ask it for the desired content. The 16% success ratio in Figure 6 for Pull protocols with more than 1,000 contents is explained because of the vehicles in the simulation that travel through the coverage area of the 4 infostations. We have validated this hypothesis by performing additional simulations with just two infostations and, as expected, the success ratio is halved. The same reasoning applies to the MHTI protocol, although the asymptotic performance is two times better because more cars are able to reach the closest infostation through intermediate hops. However, these extra hops imply multiplying the relative overhead of the MHTI protocol compared to the one-hop Pull one. In any case, with many contents, a greater number of infostations would be beneficial for the performance of Pull and MHTI protocols, but it will not be a significant help for Push ones.

The important conclusion is that the number of contents has a significant effect on the performance of content distribution protocols. In fact, the effect is much larger than the optimizations or the type of protocol itself. Nevertheless, as we have seen in Section 2, little research in this field considers more than a small number of contents.

### 5.3. Effect of content popularity

In our third scenario we explore the impact of having contents with different popularity, so vehicles will be more likely to be interested in some contents than others. In this scenario we assume that each vehicle is interested in one content out of  $M = 1,000$  possible ones. Vehicle density is kept

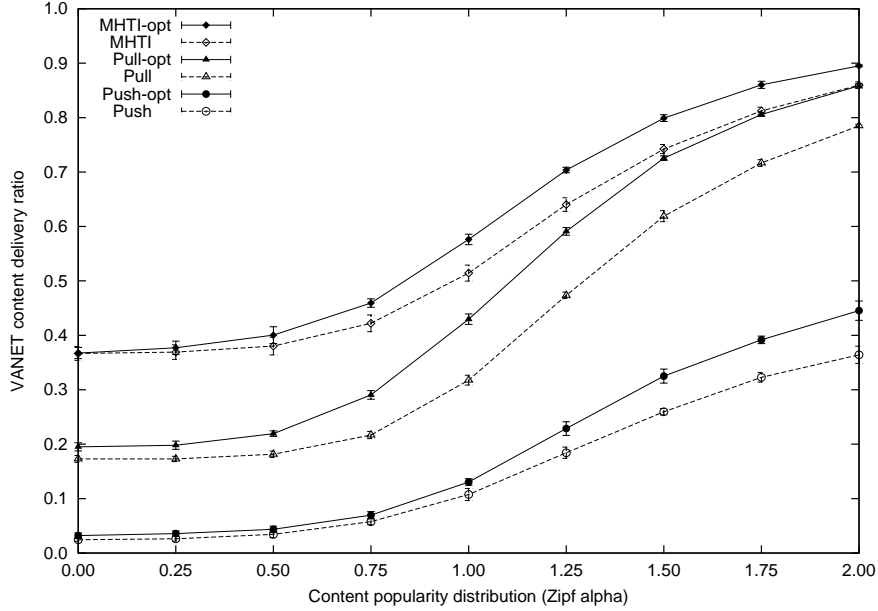


Figure 7: Distribution of multiple contents with Zipf popularity ( $M = 1,000$  contents,  $N = 6,000$  cars)

at  $N = 6,000$  cars. To model content popularity we use a Zipf distribution, and we analyze different values of its  $\alpha$  skewness exponent, ranging from 0.0 (i.e. all contents are equally probable) to 2.0 (i.e. most vehicles are interested in few, highly popular contents).

The VANET success ratios and overheads for this scenario are shown in Figure 7 and Table 6. As it can be seen, the performance of the three families of protocols increases with the popularity skewness of contents, because the more popular a content is, the easier is to find it in neighboring cars. However, for Push protocols this improvement with popularity is limited due to the large number of contents, which makes cars to waste bandwidth broadcasting less popular contents. Nevertheless, Push protocols still benefit from popularity because, although the Push protocol itself treats all contents in a similar way, popular contents are downloaded more times through 5G, and thus they are seeded and advertised more times than unpopular ones.

The effect of popularity is much more significant in the case of the Pull



Table 6: Relative overhead of distributing multiple contents with Zipf popularity ( $M = 1,000$  contents,  $N = 6,000$  cars)

$Zipf\alpha$	Push	Push-opt	Pull	Pull-opt	MHTI	MHTI-opt
0.00	1,427.24	1,100.61	1.66	5.69	11.51	9.91
0.50	1,034.32	803.16	1.64	5.11	11.07	8.98
1.00	323.05	265.13	1.56	2.76	7.37	5.31
1.50	133.35	106.38	1.89	1.83	4.21	2.87
2.00	95.02	77.70	2.34	1.67	3.51	2.18

and MHTI protocols, going from a low performance and high overhead for uniform popularity ( $Zipf\ \alpha = 0.0$ ) to a good performance level for highly skewed popularity distributions (e.g.,  $Zipf\ \alpha = 2.0$ ). In these protocols, vehicles ask explicitly for the contents they want, so popular contents are broadly distributed in the VANET and available in the cache of many cars, while little time is wasted in transmitting unpopular contents. Although for Pull protocols this means less popular contents rarely can be fetched through the VANET and are downloaded via 5G, the multi-hop MHTI protocol allows to get these low popularity contents from the nearest infostation in many cases, and thus it is the best performer.

The important conclusion is that popularity also has a great impact on the performance of content distribution protocols in VANETs, being extremely beneficial for the performance of pull protocols, while having little effect in push ones. Therefore, content popularity should not be ignored when analyzing VANET protocols, because it may have a significant influence in the performance as compared with other protocols or optimizations.

#### 5.4. Effect of the cellular backup network

Given that VANET content delivery protocols can fail, and that the performance is very dependent on the traffic scenario, the cellular backup network plays a key role in our proposal because it allows offering a guaranteed service: users can always get the contents they need in a bounded time. However, the use of a cellular backup network also affects the performance of the VANET content delivery protocols themselves due to its seeding effect: contents that are not initially available in a particular geographical area can then be provided to that area through the cellular network.

The effect of the cellular backup network for different protocols and different content popularities can be seen in Figure 8. In this figure we compare

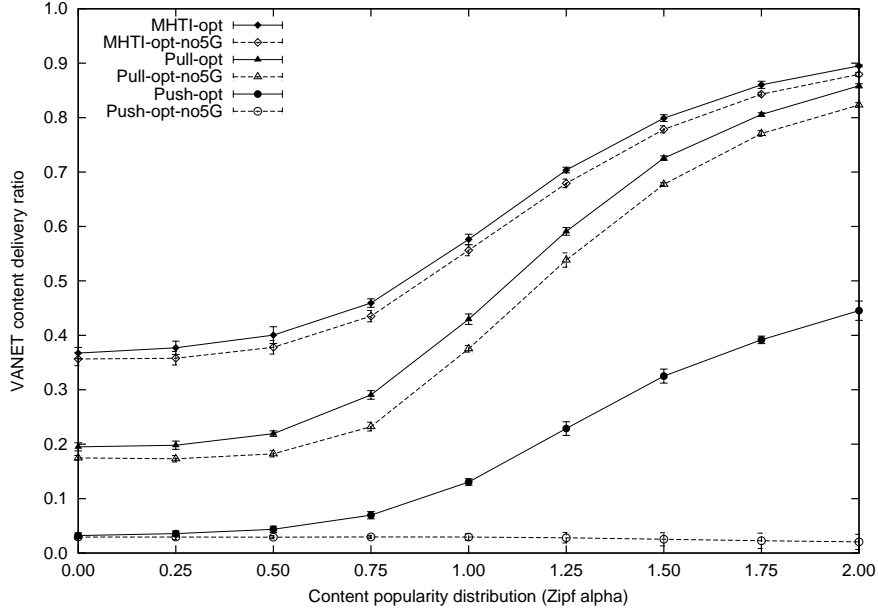


Figure 8: Effect of the 5G network with content popularity ( $M = 1,000$  contents,  $N = 6,000$  cars)

the results presented in Figure 7 for the protocols with optimizations, with the results in the same scenarios but without using the 5G backup network. An obvious first effect is that, without the 5G network, the VANET delivery ratio is also the total content delivery ratio, as contents cannot be obtained using the cellular network when the VANET protocol fails. But we can also observe an effect on the percentage of contents that can be obtained through the VANET, which is better when using a cellular backup network than without it. This is due to the seeding effect: contents downloaded through the 5G network can be later served using the VANET to other vehicles.

The seeding effect is critical for the improvement of performance with popularity in Push protocols. Push protocols by themselves lack mechanisms to benefit from popularity, since cars just advertise all cached contents with the same probability. Without the cellular backup network, popular contents are not cached or distributed more than any other contents. So, as we see in Figure 8, the percentage of contents obtained through the VANET

does not improve even for skewed popularities (i.e. high *Zipf*  $\alpha$ ). However, when using a cellular backup network, popular contents are downloaded via the cellular network with higher probability than unpopular ones, and thus there are more copies in the VANET. Thus, the seeding effect of the cellular backup network has a significant impact on the performance of the Push protocols, specially with highly skewed popularity distributions, because now the VANET performance increases with popularity.

The cellular network seeding effect with the Pull and MHTI protocols is different from the Push case. In both Pull and MHTI protocols, contents are requested explicitly in the VANET, so when we have popular contents, these are the contents that most vehicles are looking for, and thus they are distributed more. Therefore, both protocols already benefit from content popularity, i.e., when  $\alpha$  increases the performance of the protocols improves, even without using a cellular backup network. Still, the cellular network seeding complements this effect helping to improve the performance by introducing new contents in VANET areas far from infostations. Nevertheless, the effect is not as significant as in the Push protocols because, although the benefits of downloading popular contents by cellular would also be greater with highly skewed popularities, in those scenarios contents are already widely replicated in the VANET by the content distribution protocols.

### 5.5. Performance with Internet-like contents

The previous subsections have provided a systematic analysis of how the number of contents and their popularity affect the performance of VANET content distribution protocols, as well as the need of a cellular backup network. Although it is still unclear what will be the characteristics of VANET applications, and probably they will greatly vary, we think many infotainment applications will provide Internet contents to drivers and passengers, and thus it is worthy to evaluate the performance of VANET content distribution protocols using similar characteristics to current Internet contents [35].

For that purpose we have repeated the simulations with the maximum number of contents ( $M = 100,000$  contents), a fixed Zipf popularity (*Zipf*  $\alpha = 0.8$ ), and a 5G backup network, while varying the number of cars in order to study the effect of traffic density. Figure 9 shows the VANET content delivery ratio, and Table 7 shows the relative overhead of the three different families of protocols.

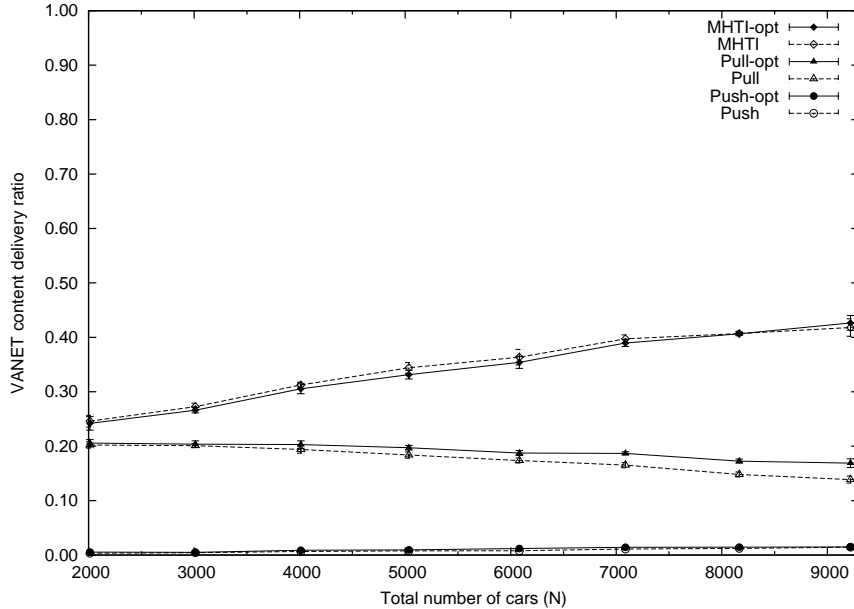


Figure 9: Distribution of Internet-like contents under different vehicle densities ( $M = 100,000$  contents, *Zipf*  $\alpha = 0.8$ )

As already suggested by previous experiments, the combination of a high number of contents with a moderate popularity reduces the performance of all VANET content delivery protocols, although in different degrees. In particular, Push protocols are almost useless with such high number of contents, even with cellular network seeding, because it is rather difficult that someone advertises the exact content you are interested in. The one-hop Pull protocols only achieve a 20% delivery ratio due to the rather flat popularity, thus VANET contents are mostly obtained when driving close to an infostation. Interestingly, its performance decreases with car density because, in order to avoid traffic jams, the DUA module spreads the cars more over the map (as real drivers do), skipping the large avenues where the four infostations are placed.

The protocol that better copes with such Internet-like scenario is the MHTI one, since it is able to request unpopular contents to the closest infostation. However, its performance greatly depends on traffic density so

Table 7: Relative overhead of distributing Internet-like contents under different vehicle densities ( $M = 100,000$  contents, *Zipf*  $\alpha = 0.8$ ,  $N$  vehicles)

$N$	Push	Push-opt	Pull	Pull-opt	MHTI	MHTI-opt
2,013	9,099.42	5,554.51	1.59	5.38	5.40	8.28
3,012	7,265.96	6,068.16	1.59	5.45	6.91	8.97
4,011	4,714.99	3,454.89	1.61	5.49	8.30	9.29
5,035	4,232.32	3,366.89	1.64	5.64	9.61	9.82
6,082	4,389.02	2,947.84	1.66	5.92	11.62	10.40
7,087	3,451.90	2,650.76	1.70	5.95	12.60	10.41
8,165	3,484.27	2,957.74	1.77	6.46	15.22	11.13
9,220	3,179.22	2,738.20	1.84	6.64	17.14	11.43

Table 8: Average number of hops used by the MHTI protocol to get contents ( $M = 100,000$  contents, *Zipf*  $\alpha = 0.8$ ,  $N$  vehicles)

$N$	MHTI	MHTI-opt
2,013	1.70	1.60
3,012	2.06	1.78
4,011	2.50	2.01
5,035	2.74	2.17
6,082	2.92	2.26
7,087	3.02	2.27
8,165	3.13	2.25
9,220	3.24	2.24

multi-hop paths can occur. In low traffic densities its performance is slightly better than the one-hop Pull protocol but, with higher densities, it almost reaches a 50% VANET delivery ratio. Table 8 shows the average number of hops needed by the MHTI and the MHTI-opt protocols to get the contents from an infostation or an intermediate car. It is interesting to see that, as the number of average hops increases with higher densities, the difference between the performance of the Pull protocol and the MHTI protocol increases (see Figure 9) as the multi-hop paths are the basis of the advantage of the MHTI protocol compared with the Pull protocol: the MHTI protocol can reach farther to fetch the less popular contents. Additionally, we can see in Table 8 that the MHTI-opt protocol performs less hops than the MHTI protocol, because the optimizations allow finding contents in an intermediate car closer to the requesting vehicle.

Therefore, in the MHTI protocol, performance increases with car density. This is a convenient behavior because, when there are few cars, they can safely use the cellular backup network to fetch the contents, whereas during peak hours a VANET using the MHTI protocol is able to offload almost half of the traffic from the overloaded cellular network.

## 6. Conclusions

Content distribution is considered an appropriate communication paradigm to build infotainment and traffic efficiency applications in VANETs. Therefore, in the literature there are several proposals of content distribution protocols for VANETs. The evaluation of these proposals has been mainly focused on performance parameters, such as the percentage of cars that receive a content or the overhead of the proposed protocols. Nevertheless, a review of the literature shows that less effort has been dedicated to model the applications that consume the contents being distributed, and to study how the characteristics of the contents influence the performance of these protocols. Another aspect that has not received enough attention is the combination of the VANET with a cellular network in order to be able to provide a guaranteed service.

In this paper, we have thoroughly studied the influence on the performance of different VANET content distribution protocols of the number and popularity of contents, and the presence of a cellular backup network. Our study has been performed with a realistic simulation model that includes a real urban map, buildings that affect signal propagation, and a faithful micro mobility vehicle simulation. We also consider a cellular backup network so, if contents are not received through the VANET, they are requested through the cellular network. This is often ignored when studying VANET protocols, but in the real world, as the connectivity in the VANET cannot be guaranteed but the service must be, a backup network will be surely required. This means that contents are always obtained, so the main performance figures are the number of contents obtained through the VANET, and thus offloaded from the cellular network, as well as the overhead to do so.

In our study, we have found that VANET content distribution protocols are very sensitive to the total number of contents. The performance of push protocols is very good when distributing a very small number of contents (less than 10), but it is poor with an increase in the number of contents. One-hop pull protocols achieve only a slightly better performance. The popularity

of contents contributes to reduce the penalty of an increase in the total number of contents, because popularity reduces the number of significant contents. Still, pull protocols are able to benefit from popularity to improve performance more efficiently than push ones. Additionally, we have shown that a cellular backup network creates a seeding effect that helps improving the performance of all VANET content distribution protocols, although this improvement varies for different families of protocols.

In this paper, we have also proposed a multi-hop pull protocol for content distribution in VANETs, called Multi-Hop To Infostation (MHTI) protocol, in which content requests are sent towards the closest infostation, although they can also be replied by any car in the path that already has the content in its cache. The performance of this protocol allows using the VANET to obtain a significant percentage of contents in peak hours, therefore saving cellular network resources, even with a large number of contents, and it further benefits from content popularities in order to obtain more contents through the VANET.

In our work, a popular content is a content that is requested by many vehicles. But we assume that the popularity of a content is not known by the vehicle requesting it. Therefore, the analyzed content distribution protocols do not use special strategies depending on the popularity of the contents to be requested. In general, knowing a priori the popularity can be very difficult, as it depends on the interests of other vehicles. On the other hand, if popularity were known a priori, it would be possible to implement more intelligent strategies, such as asking for a content through the VANET only if its popularity is higher than a certain threshold, further optimizing the content distribution protocols.

An important conclusion from our work is that any proposal for a VANET content distribution protocol must consider the target applications and their characteristics in terms of number of contents and popularity or, alternatively, it must study the performance for a range of number of contents and popularities, as they may significantly influence its performance. We also think that a cellular backup network is also required for reliable service, and its presence influences the performance of the VANET itself, so it should also be considered when studying content distribution protocols.

In our future work we plan to investigate scenarios with heterogeneous content size and different latency requirements to analyze their impact on content distribution protocols. We are also interested in analyzing the sensibility of the performance of content distribution protocols to the number of

infostations.

## Acknowledgment

We would like to thank the reviewers for their insightful comments that have helped to improve the paper.

This work has been funded by the Spanish Ministerio de Economía y Competitividad through the ADAS-ROAD project (TRA2013-48314), and by Comunidad de Madrid through the MEDIANET-CM project (S-2009/TIC1468).

## References

- [1] V. Sandonis, I. Soto, M. Calderon, M. Urueña, Vehicle to internet communications using the ETSI ITS GeoNetworking protocol, *Transactions on Emerging Telecommunications Technologies*. 27 (3) (2016) 373 – 391. doi:10.1002/ett.2895.
- [2] C. Maihöfer, T. Leinmüller, E. Schoch, Abiding geocast: Time-stable geocast for ad hoc networks, in: *ACM International Workshop on Vehicular Ad Hoc Networks (VANET)*, ACM, 2005, pp. 20–29. doi:10.1145/1080754.1080758.
- [3] H. Wu, R. Fujimoto, R. Guensler, M. Hunter, MDDV: A mobility-centric data dissemination algorithm for vehicular networks, in: *ACM International Workshop on Vehicular Ad Hoc Networks (VANET)*, ACM, 2004, pp. 47–56. doi:10.1145/1023875.1023884.
- [4] B. Xu, A. Ouksel, O. Wolfson, Opportunistic resource exchange in inter-vehicle ad-hoc networks, in: *IEEE International Conference on Mobile Data Management. Proceedings*, 2004, pp. 4–12. doi:10.1109/MDM.2004.1263038.
- [5] L. Wischhof, A. Ebner, H. Rohling, Information dissemination in self-organizing intervehicle networks, *IEEE Transactions on Intelligent Transportation Systems* 6 (1) (2005) 90–101. doi:10.1109/TITS.2004.842407.
- [6] Y. Lim, S. Ahn, K.-H. Cho, Abiding geocast for commercial ad dissemination in the vehicular ad hoc network, in: *IEEE International Conference on Consumer Electronics (ICCE)*, 2011, pp. 115–116. doi:10.1109/ICCE.2011.5722491.



- [7] N. H. Khiadani, S. M. Safavi Hemami, F. Hendessi, Introducing a handshake for data dissemination using rateless codes in vehicular ad hoc networks, *Transactions on Emerging Telecommunications Technologies*. Accepted for publication, available online. doi:10.1002/ett.2944.
- [8] V. Kone, H. Zheng, A. Rowstron, G. O’Shea, B. Zhao, Measurement-based design of roadside content delivery systems, *IEEE Transactions on Mobile Computing* 12 (6) (2013) 1160–1173. doi:10.1109/TMC.2012.90.
- [9] N. Cheng, N. Lu, N. Zhang, X. S. Shen, J. W. Mark, Vehicular WiFi offloading: Challenges and solutions, *Vehicular Communications* 1 (1) (2014) 13 – 21. doi:10.1016/j.vehcom.2013.11.002.
- [10] M. Hatton, M2m growth necessitates a new approach to network planning and optimisation, Machina Research, white paper, <https://machinaresearch.com/report/m2m-growth-necessitates-a-new-approach-to-network-planning-and-optimisation/> (May, 2015).
- [11] P. Costa, D. Frey, M. Migliavacca, L. Mottola, Towards lightweight information dissemination in inter-vehicular networks, in: *ACM International Workshop on Vehicular Ad Hoc Networks (VANET)*, ACM, 2006, pp. 20–29. doi:10.1145/1161064.1161069.
- [12] I. Leontiadis, P. Costa, C. Mascolo, Persistent content-based information dissemination in hybrid vehicular networks, in: *IEEE International Conference on Pervasive Computing and Communications (PerCom)*, 2009, pp. 1–10. doi:10.1109/PERCOM.2009.4912758.
- [13] Omnet++ discrete event simulator, <http://www.omnetpp.org/> ([Accessed: June 27, 2016]).
- [14] Sumo – simulation of urban mobility, <http://sumo-sim.org/> ([Accessed: June 27, 2016]).
- [15] D. Krajzewicz, J. Erdmann, M. Behrisch, L. Bieker, Recent development and applications of SUMO - Simulation of Urban MObility, *International Journal on Advances in Systems and Measurements* 5 (3&4) (2012) 128–138.
- [16] J. Zhao, Y. Zhang, G. Cao, Data pouring and buffering on the road: A new data dissemination paradigm for vehicular ad hoc networks,

- IEEE Transactions on Vehicular Technology 56 (6) (2007) 3266–3277. doi:10.1109/TVT.2007.906412.
- [17] M. Amadeo, C. Campolo, A. Molinaro, CRoWN: Content-centric networking in vehicular ad hoc networks, IEEE Communications Letters 16 (9) (2012) 1380–1383. doi:10.1109/LCOMM.2012.072012.120282.
- [18] C. Bian, T. Zhao, X. Li, W. Yan, Boosting named data networking for data dissemination in urban VANET scenarios, Vehicular Communications 2 (4) (2015) 195 – 207. doi:10.1016/j.vehcom.2015.08.001.
- [19] R. Atat, E. Yaacoub, M.-S. Alouini, F. Filali, A. Abu-Dayya, Delay-sensitive content distribution via peer-to-peer collaboration in public safety vehicular ad-hoc networks, Ad Hoc Networks 16 (2014) 182–196. doi:10.1016/j.adhoc.2013.12.007.
- [20] M. Gerla, C. Wu, G. Pau, X. Zhu, Content distribution in VANETs, Vehicular Communications 1 (1) (2014) 3 – 12. doi:10.1016/j.vehcom.2013.11.001.
- [21] M. Gramaglia, C. J. Bernardos, M. Calderon, Seamless internet 3G and opportunistic WLAN vehicular connectivity, EURASIP Journal Wireless Communications and Networking 2011:183 (2011) 1–20. doi:10.1186/1687-1499-2011-183.
- [22] I. Lequerica, P. Ruiz, V. Cabrera, Improvement of vehicular communications by using 3G capabilities to disseminate control information, IEEE Network 24 (1) (2010) 32–38. doi:10.1109/MNET.2010.5395781.
- [23] C. J. Bernardos, I. Soto, M. Calderon, F. Boavida, A. Azcorra, VARON: Vehicular ad hoc route optimisation for NEMO, Computer Communications 30 (8) (2007) 1765–1784. doi:10.1016/j.comcom.2007.02.011.
- [24] G. Remy, S.-M. Senouci, F. Jan, Y. Gourhant, LTE4V2X – impact of high mobility in highway scenarios, in: Global Information Infrastructure Symposium (GIIS), 2011, pp. 1–7. doi:10.1109/GIIS.2011.6026706.
- [25] J. Ahn, M. Sathiamoorthy, B. Krishnamachari, F. Bai, L. Zhang, Optimizing content dissemination in vehicular networks with radio heterogeneity, IEEE Transactions on Mobile Computing 13 (6) (2014) 1312–1325. doi:10.1109/TMC.2013.100.

- [26] B. Karp, H. T. Kung, Gpsr: Greedy perimeter stateless routing for wireless networks, in: Proceedings of the 6th Annual International Conference on Mobile Computing and Networking, MobiCom'00, ACM, 2000, pp. 243–254. doi:10.1145/345910.345953.
- [27] Veins – vehicles in network simulation, <http://veins.car2x.org/> ([Accessed: June 27, 2016]).
- [28] C. Sommer, D. Eckhoff, R. German, F. Dressler, A computationally inexpensive empirical model of IEEE 802.11p radio shadowing in urban environments, in: Eighth International Conference on Wireless On-Demand Network Systems and Services (WONS), 2011, pp. 84–90. doi:10.1109/WONS.2011.5720204.
- [29] D. Krajzewicz, Traffic simulation with SUMO - Simulation of Urban MOBility, Fundamentals of Traffic Simulation 145 (2010) 269–293.
- [30] Openstreetmap, <http://www.openstreetmap.org/> ([Accessed: June 27, 2016]).
- [31] Java openstreetmap editor, <http://josm.openstreetmap.de/> ([Accessed: June 27, 2016]).
- [32] C. Gawron, Simulation-based traffic assignment – computing user equilibria in large street networks, Ph.D. thesis (1999).  
URL <http://e-archive.informatik.uni-koeln.de/366/>
- [33] M. Behrisch, D. Krajzewicz, P. Wagner, Y. Wang, Comparison of methods for increasing the performance of a DUA computation, in: International Symposium on Dynamic Traffic Assignment (DTA), 2008, pp. 1–9.
- [34] P. Hart, N. Nilsson, B. Raphael, A formal basis for the heuristic determination of minimum cost paths, IEEE Transactions on Systems Science and Cybernetics 4 (2) (1968) 100–107. doi:10.1109/TSSC.1968.300136.
- [35] C. Fricker, P. Robert, J. Roberts, N. Sbihi, Impact of traffic mix on caching performance in a content-centric network, in: IEEE Conference on Computer Communications Workshops (INFOCOM WKSHPS), 2012, pp. 310–315. doi:10.1109/INFOCOMW.2012.6193511.